



QES1517F - Series
Fanless and Low Power 17" Panel PC
Intel Chip Set



Features and Benefits:

- Intel Celeron M ULV CPU on board
- Totally fanless and quiet design
- Low power consumption and economical design
- On-board IDE interface, Type II Compact Flash slot
- Optional slim CD-ROM drive
- Optional PCI Expansion slot (1 or 3 slots)
- 24V DC power support, optional power adapter for AC power
- Industry level of durability against dust and powerful jetting
- RoHS Compliant

Highlights:

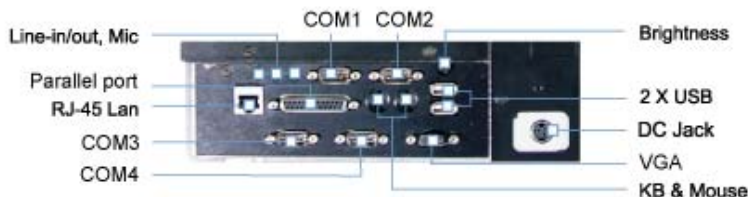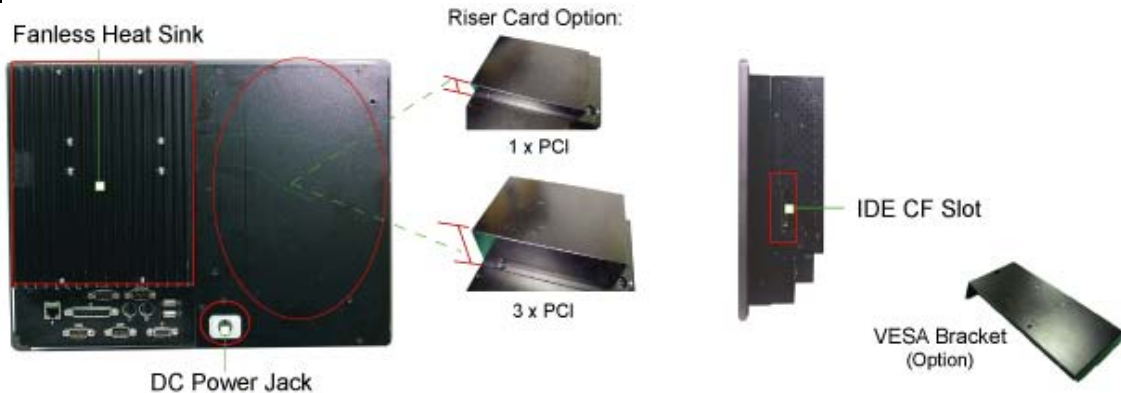

QES1517F - Series Specifications

Systems:

| | |
|------------------------------|--|
| <i>CPU Type</i> | Intel Celeron M ULV 1.0GHz on board |
| <i>Memory Support</i> | 1 x 200pin DDR SO-DIMM, support DDR 333 SDRAM up to 1GB |
| <i>Front Bezel</i> | Aluminum |
| <i>Open Frame</i> | Yes |
| <i>IP65 / NEMA4</i> | Yes |
| <i>Power Supply</i> | DC 24Vin 80W power supply / AC 100-240Vin (optional power adaptor) |
| <i>O.S. Support</i> | Win 98SE / 2000 / XP / CE.net, Linux Redhat 8.0/9.0 |
| <i>Dimension (W x H x D)</i> | 440mm x 344mm x 117mm (17.32" x 13.54" x 4.60") |
| <i>System Weight</i> | 10.5 Kg (17.63lb) |
| <i>VESA Mounting Support</i> | 75mm / 100mm VESA bracket optional |
| <i>Certificate</i> | CE / FCC |

I/O Ports:

| | |
|---------------------------|--|
| <i>USB</i> | 2 x USB 2.0 |
| <i>Keyboard / Mouse</i> | 2 |
| <i>Audio</i> | Line in / Line out / MIC in |
| <i>Parallel</i> | 1 x parallel port (SPP / EPP / ECP) |
| <i>Serial Port</i> | 4 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, supports +5V only |
| <i>LAN</i> | 10/100 Mbps |
| <i>VGA</i> | 1 |
| <i>Brightness Control</i> | VR on rear panel |
| <i>Drive Bay</i> | 1 x 2.5" HDD, 1 x IDE CF slot on board, 1 x Slim CD-ROM (optional) |
| <i>Expansion Slots</i> | 1 x PCI or 3 x PCI slot (optional) |

Display

| | |
|---------------------|-------------------------------------|
| <i>LCD</i> | 17" SXGA TFT LCD |
| <i>Touch Screen</i> | 7W Analog resistive (USB interface) |

Environment

| | |
|------------------------------|-----------------------|
| <i>Operation Temperature</i> | 0°~40°C (32°~104°F) |
| <i>Storage Temperature</i> | -20°~60°C (-4°~140°F) |
| <i>Humidity</i> | 20~90% |

Options

| | |
|------------------------------|--|
| <i>Operating System</i> | Windows XP Pro (installed w/license) |
| <i>DVD-RW Upgrade</i> | Upgrade to DVD-RW from CD-ROM |
| <i>Memory Upgrades</i> | Upgrade to 512MB DDR or Upgrade to 1GB DDR |
| <i>Hard Drive Upgrades</i> | Upgrade to 160GB |
| <i>Riser Cards</i> | 1 x PCI + 1 x ISA Riser Card or 3 x PCI + 3 x ISA Riser Card |
| <i>CF Module</i> | Compact Flash Module |
| <i>Mounting Option</i> | VESA Bracket |
| <i>External Power Supply</i> | 120W, 24V DC output power adapter |